


Xerox® Integrated Colour Server for the Xerox® PrimeLink® C9065/C9070 Printer

Modernise the way you work.

With the combination of the Xerox® PrimeLink® C9065/C9070 Printer and the Xerox® Integrated Colour Server, powerful performance is at your fingertips. Engineered for high-end office applications, it combines world-class colour and workflows for transformative results.

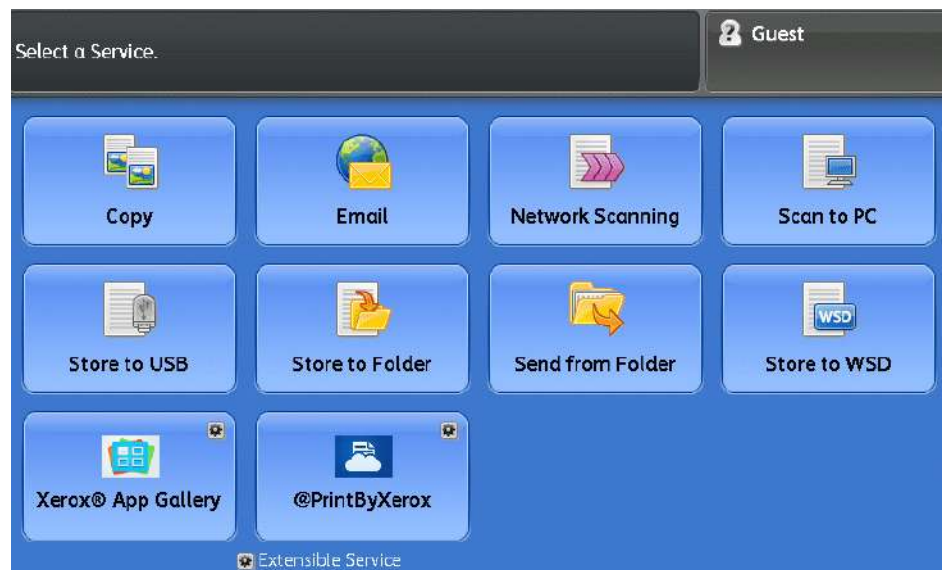

Extend your capabilities with apps from the Xerox App Gallery.

- Tailor your device to work the way you do with the ever-evolving selection of innovative apps available on the Xerox App Gallery.
- Increase your opportunities with an expansive media selection – including Extra Long Sheet (XLS) for creative banner printing – and inline finishing capabilities ranging from stapling and hole-punching to folding for presentations, brochures, reports and newsletters.
- Use Xerox® Standard Accounting and internal auditing to track device usage, set limits and control costs.
- Customise your print driver settings to save on specific applications – such as always printing emails in black and white.
- Maximise your productivity by performing scan, print, copy, fax and file routing operations simultaneously.
- Easily share files or introduce electronic archiving with powerful scan capabilities. Text-searchable files make retrieval simple. And compression technology reduces network load for faster transmission.
- Automate document routing to predefined locations such as email addresses with job flow sheets.
- Enjoy automatic installation, troubleshooting, feature setup and upgrades with the Xerox® CentreWare® IS Embedded Web Server.
- Replenish supplies automatically – Xerox® Automated Meter Readings (AMR) collects and submits readings and Xerox® Automatic Supplies Replenishment (ASR) orders ink whenever supplies run low.
- Securely print from any email-enabled device with @PrintByXerox. No software or app to download. No IT intervention. Just send an email and print at the device.

Xerox® Integrated Colour Server

HARDWARE SPECIFICATIONS

- Hard drive: 320 GB hard disk drive
- Processor: 1.6 GHz dual core
- Memory: 4 GB RAM
- OS platform: Linux
- 10.4-inch colour touchscreen flat panel display
- 10/100/1000MBT/sec standard

PRINT FEATURES

- Automatic two-sided
- Secure print
- Delay print
- Sample set
- Booklet creation
- Cover selection
- Paper selection by attribute
- N-up
- Watermarks
- Banner sheets
- Output tray selection
- Standard USB
- Colour shift slider bars

STANDARD APP CAPABILITIES

- Xerox App Gallery
- @PrintbyXerox

FAX

- Optional walkup PSTN fax (one-line and two-line options) with internet fax
- Fax over IP (T.38) kit
- Network Server Fax Enablement Kit features:
 - Fax
 - Fax forward
 - Two-sided send and receive
 - Fax up to A3

ACCOUNTING

- Xerox® Standard Accounting (copy, print, fax, scan)
- Enabling colour access control
- Network Accounting Enablement Kit

CLIENT ENVIRONMENTS SUPPORTED

- Windows® XP, Windows Server 2003 (32- and 64-bit), Windows Server 2008 (32- and 64-bit), Windows Server 2012, Windows Vista (32- and 64-bit), Windows 7 (32- and 64-bit), Windows 8 (32- and 64-bit), Mac OS® 10.7 and above, Solaris® 9 and 10, HP-UX® 11 v2, IBM® AIX® 5, Red Hat® Fedora® Core 15-17, Red Hat Enterprise 4 and 5 openSUSE® 11 and 12, Ubuntu® Unix®
- Citrix, WHQL certification*

PDLs AND DATA FORMATS

- PDF, XPS®, PCL® 6, HP-GL2 (direct submission), TIFF, JPEG
- Adobe® PostScript® 3™ (highly recommended option)

SCAN AND COPY

A robust set of scan/copy functions plus:

- Thumbnail preview
- Scan to: Home, desktop WIA, desktop TWAIN, mailbox, FTP, sFTP, USB storage device, remote printer, fax server, SMB, network scanning
- Scan to: Multiple destinations
- Scan via: NDS, SMB, HTTP, HTTPS
- High compression or quality file size settings
- Searchable PDF

SECURITY

- Access controls
- AES 256-bit encryption
- Audit log
- Certificate path validation
- Certificate revocation list (CRL)/ status protocol (OCSP)
- Common criteria certified
- Detection of external program falsification (XCP plug-in)
- Domain filtering
- FIPS 140-2
- Firmware verification
- Immediate disk overwrite
- IP address filtering



- IPsec
- Network authentication
- Pre-installed self-signed certificates
- Role-based permissions
- Secure print
- Security certificate management
- SIPRNet
- Smart card enablement (CAC/PIV.NET)
- SNMPv3
- Status protocol (OCSP)
- TLS/SSL

OTHER OPTIONS

- USB direct print, media card reader, common access card enablement kit, accounting options
- Xerox Extensible Interface Platform® enabled, foreign device interface
- Mobile/Smartphone printing

ELECTRICAL REQUIREMENTS

- Printer: 110-127 VAC, 50/60 Hz
- Options: 100-240 VAC, 50/60 Hz
- Optional feeding/finishing:
 - Each module requires 100-240 VAC, 50/60 Hz power

PRINTER DIMENSIONS

Base Unit w/ Offset Catch Tray:

- Height: 1,391.5 mm
- Width: 1,574 mm
- Depth: 803.5 mm

For more information on the Xerox® Integrated Colour Server, please contact your Xerox representative, call **1-800-ASK-XEROX** or visit us online at **xerox.com**.

*Dependent on configuration, software version